



**Type 100**  
**Series 100 (without struts)**

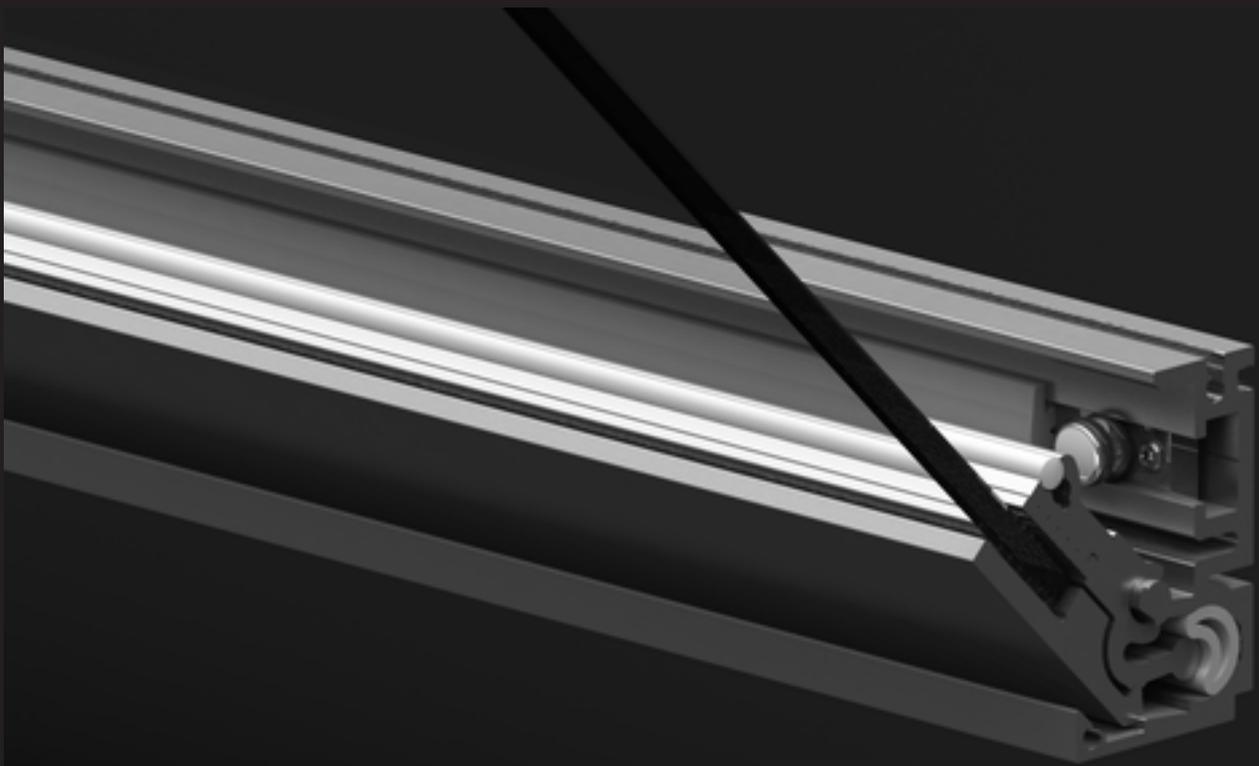

## Product characteristics


- extremely small with 39 x 59 mm
- with locking function
- adjustable front glass
- damped opening of the glass (6 mm; 8mm)
- integrated upright price tag rail
- optional flat price tag rail
- removable glass front
- heating cable possible
- user-friendly assembly

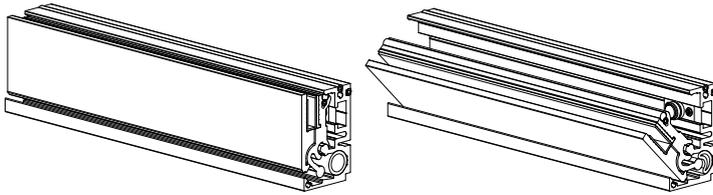


## Planning information

- assembly in front or on top of the case body
- assembly for upright or flat display
- maximum glass height 800 mm for vertical front glasses without struts (special solutions on request)
- flat price tag rail fixed on assembly, no additional fixing material needed

### Hardware variations

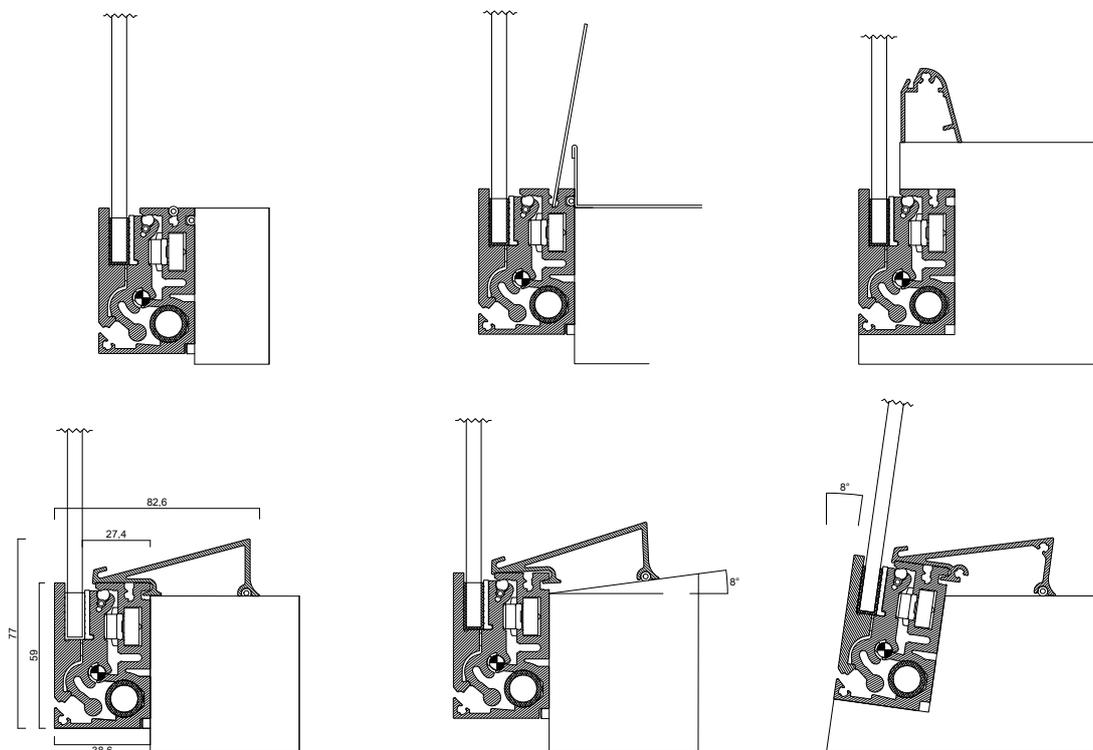


**Tilting of front glass**

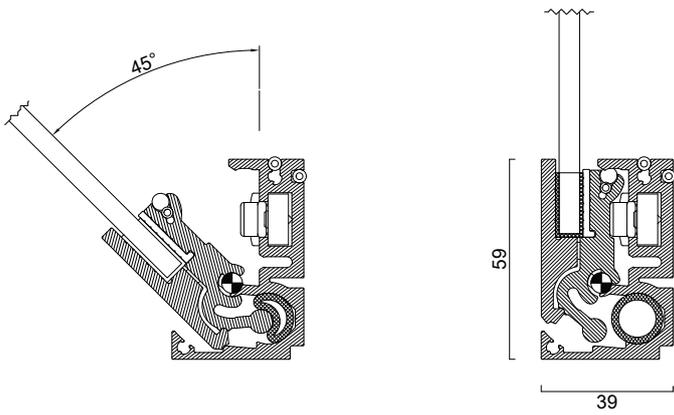

Damped final position.


Vertical locked position.

**Adjustment of front glass**

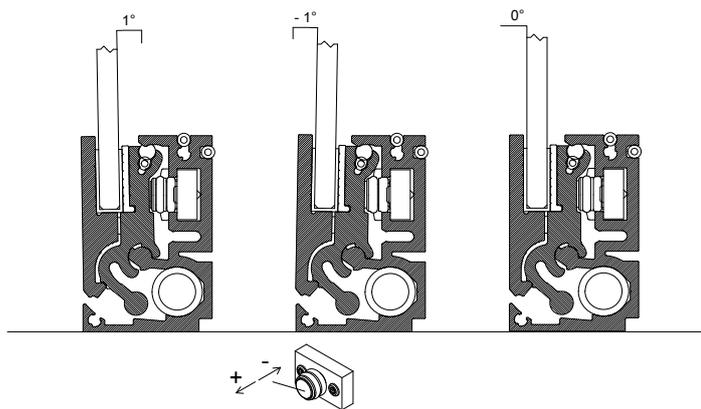


Use strikers to adjust inclination of front glass.

**Insertion of price tag rail**

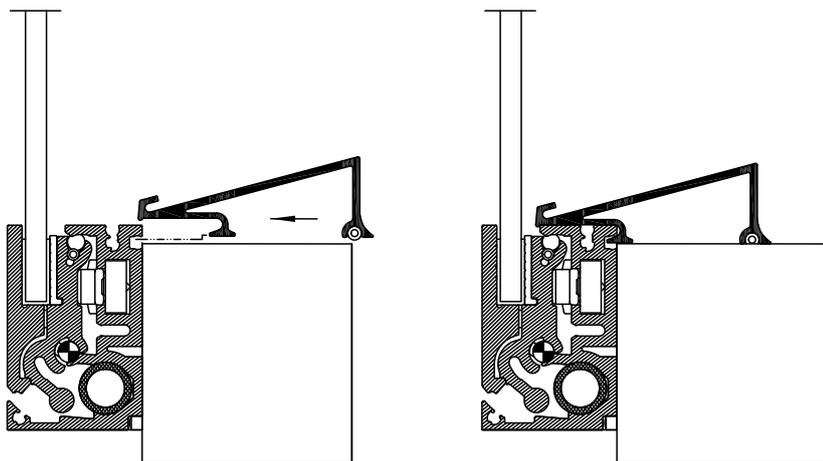

**Assembly**

■ **Hole pattern:**

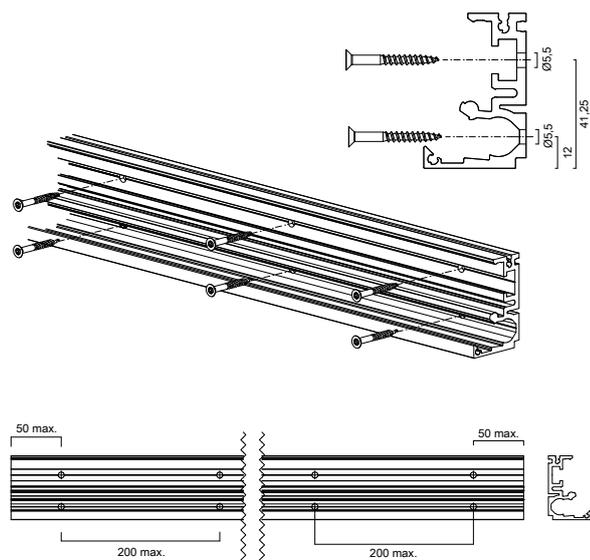


Drill position for assembly of base profile to case:  
 Fixing holes can be drilled by customer.  
 Horizontal centering of holes preset by the profile.  
 Screw distance max. 200 mm, screws Ø 5 mm with min. 30 mm length, screw positioning parallel, not shifted, in both grooves.

■ **Adjustment of locking force:**

Plastic rod 054.0650.086:  
insert over total hardware length.

Silicone 054.0547.087:  
shorten tube and insert sections in order to reduce locking force.

Cylinder pin 043.0771.070:  
in order to increase locking force cut out up to three sections of silicone tube in regular intervals in the middle area of the hardware and replace the cut-outs by cylinder pins.



■ **Lengths of relating hardware sections and front glass:**

Length of front glass [mm] = length of base profile [mm] – 5 mm

Length of glass clamp profile [mm] = length of base profile [mm] – 2 mm





Glass clamp profile:  
Max. distance of threaded holes from profile endings = 20 mm.

■ **Front glass:**

We recommend using tempered safety glass.  
Please note that we assume no warranty on the glasses.

**Type 100**  
Picture

| Picture | Product   | 5000mm | Part number            |
|---------|---|--------|------------------------|
|         | <p><b>Type 100 tilt-forward hardware</b><br/>complete<br/>for 6 mm glass<br/>incl. 8 strikers</p> | 5000mm | <b>13.443.4530.XXX</b> |
|         | <p><b>Type 100 tilt-forward hardware</b><br/>complete<br/>for 8 mm glass<br/>incl. 8 strikers</p> | 5000mm | <b>13.443.4531.XXX</b> |
|         | <p><b>Type 100 price tag rail</b><br/>reclining</p>   | 5000mm | <b>13.052.3534.XXX</b> |
|         | <p><b>Type 100 end cap small</b><br/>for version without<br/>price tag rail</p>                   |        | <b>13.443.4502.XXX</b> |
|         | <p><b>Type 100 end cap big</b><br/>for version with<br/>price tag rail</p>                        |        | <b>13.443.4503.XXX</b> |
|         | <p><b>Type 100 glass clamp profile</b><br/>for 6 mm glass, complete<br/>incl. screw set</p>       | 5000mm | <b>13.443.4540.XXX</b> |
|         | <p><b>Type 100 glass clamp profile</b><br/>for 8 mm glass, complete<br/>incl. screw set</p>       | 5000mm | <b>13.443.4541.XXX</b> |
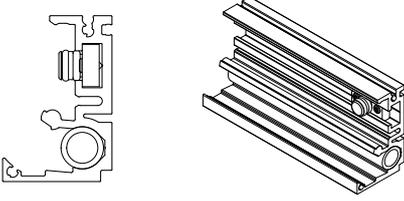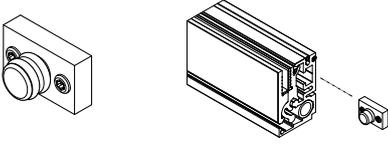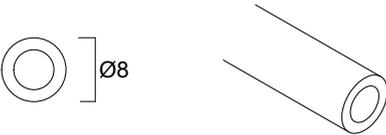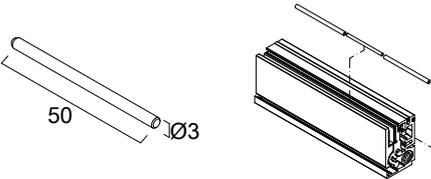
| Picture   | Product  |                          | Part number   |
|---|--|--------------------------|---|
|    | <b>Type 100 base profile</b>   | 5000mm                   | 13.443.4550.XXX                                       |
|    | <b>Type 100 striker</b>  | VPE 8 Stk.<br>VPE 1 Stk. | <b>13.443.4512.000</b><br><b>13.443.4511.000</b>      |
|   | <b>Silicone, Ø 8 X 1,5 mm</b><br>transparent<br>damping profile  | 25m                      | 13.054.0653.087                                       |
|  | <b>Plastic rod</b><br>total or partial insertion to<br>control locking force                                       | 3000mm                   | 13.054.0650.086                                       |
|   | <b>Cylinder pin</b><br>for strengthening<br>of locking force<br><br>installation under<br>plastic rod 054.0650.086 |                          | 13.043.0771.070                                       |
|  | <b>Silicone, Ø 4 X 1 mm</b><br>transparent   | 25m<br>5000mm            | <b>13.054.0547.087</b><br><b>13.054.0547.087.5000</b> |

© ]Ø4